


- 內裝CMOS IC故具高信賴度及穩定度
- 精確度高，往復誤差小於±1%以下
- 兩只電源指示燈，可清楚指示電源接通及時間到指示
- 9.9sec/99sec, 9.9min/99min, 9.9hr/99hr, 99.9sec/999sec, 99.9min/999min, 99.9hr/999hr 兩段時間切換
- A,B接點，可在面板上轉換
- 使用接合器(Type Y-40)即可將標準露出安裝型轉變成埋入安裝型


規格

時間範圍		SM:9.9S/99S/9.9M/99M 99.9S/999S/99.9M/999M MH:9.9M/99M/9.9H/99H 99.9M/999M/99.9H/999H			
額定電壓		DC(V):12, 24, 48 AC(V):12, 24, 48, 110, 220, 240, 380, 415, 440,50/60Hz			
指示燈動作		ON-UP Two indicator Lamp			
輸出接點	型號	AH3-ND		AH3-ND3	
	限時1C		5A		5A
	限時2C	5A		5A	
	瞬時1C		5A		5A
壽命	機械	5×10 ⁶ times			
	電氣	10 ⁵ times			
復歸時間		0.1 sec max			
消耗功率		2VA			
使用周圍溫度		-10°C~+55°C			
使用周圍濕度		45~85%RH			
重量		Approx. 150g		Approx. 150g	

接線圖與時序圖

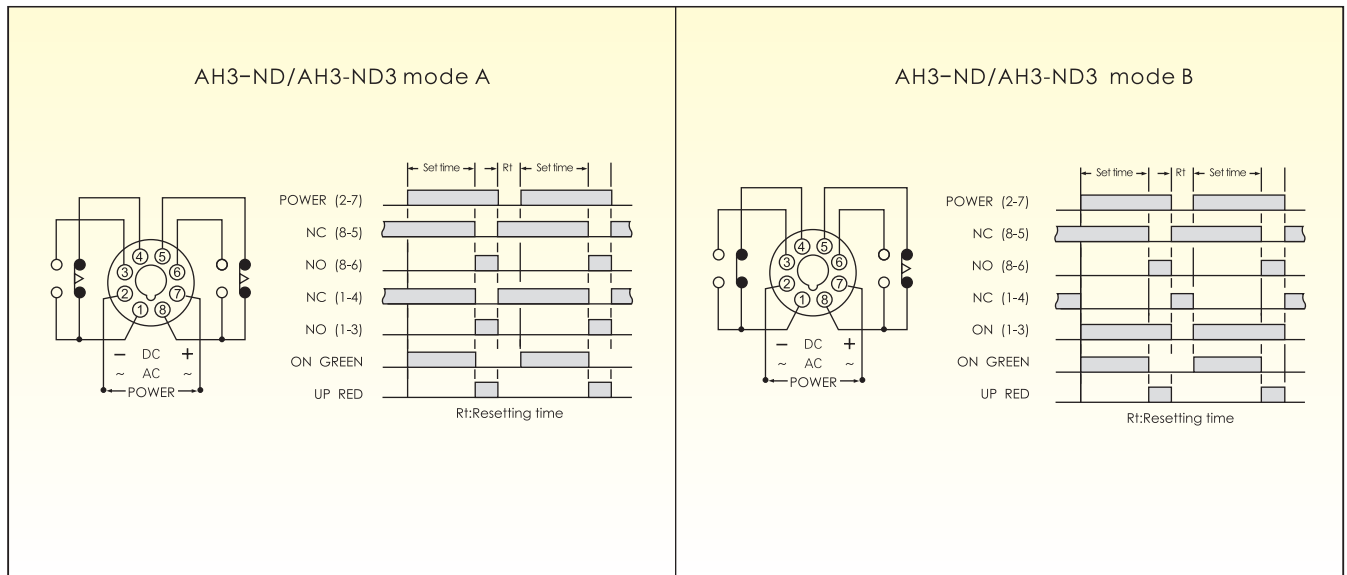

外觀尺寸圖

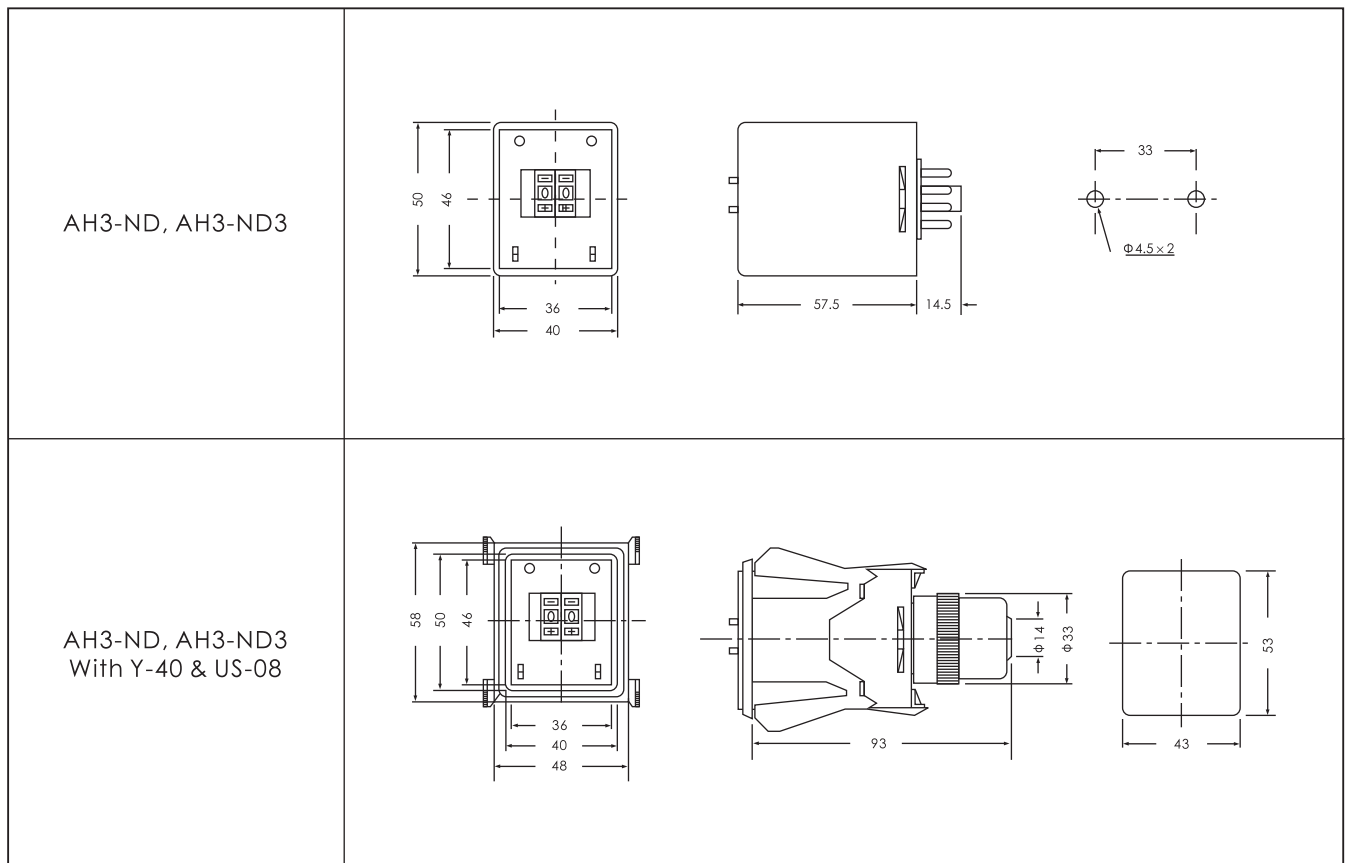

士研電氣有限公司
ANY ELECTRONICS CO.,LTD.

<http://www.timer-switch.com>

<http://www.timer-relay.com>

<http://www.relay.com.cn>