


- 內裝CMOS IC故具高信賴度及穩定度
- 從0.1sec~30hrs，有5種時間範圍可選
- 兩只電源指示燈，指示電源接通及時間到指示
- 可由A/B MODE開關選擇輸出2組限時接點(2C)，或1組限時接點1組瞬時接點(1A1C)

規格

時間範圍		A: 1S, 10S, 1M, 10M B: 3S, 30S, 3M, 30M C: 6S, 60S, 6M, 60M D: 1M, 10M, 1H, 10H E: 3M, 30M, 3H, 30H					
額定電壓		DC(V): 12, 24, 48 AC(V): 12, 24, 48, 110, 220, 240, 380, 415, 440, 50/60Hz					
指示燈動作		ON-綠燈 UP-紅燈					
輸出接點	型號	mode A	mode B	mode A	mode B	mode A	mode B
	限時 1C		5A		5A		5A
	限時 2C	5A		5A		5A	
	瞬時 1C		5A		5A		5A
壽命	機械	5 x 10 ⁶ times					
	電氣	10 ⁵ times					
復歸時間		0.1 sec max					
消耗功率		2VA					
使用周圍溫度		-10°C~ +55°C					
使用周圍濕度		45~85%RH					
重量		Approx. 170g		Approx. 175g		Approx. 180g	

接線圖與時序圖

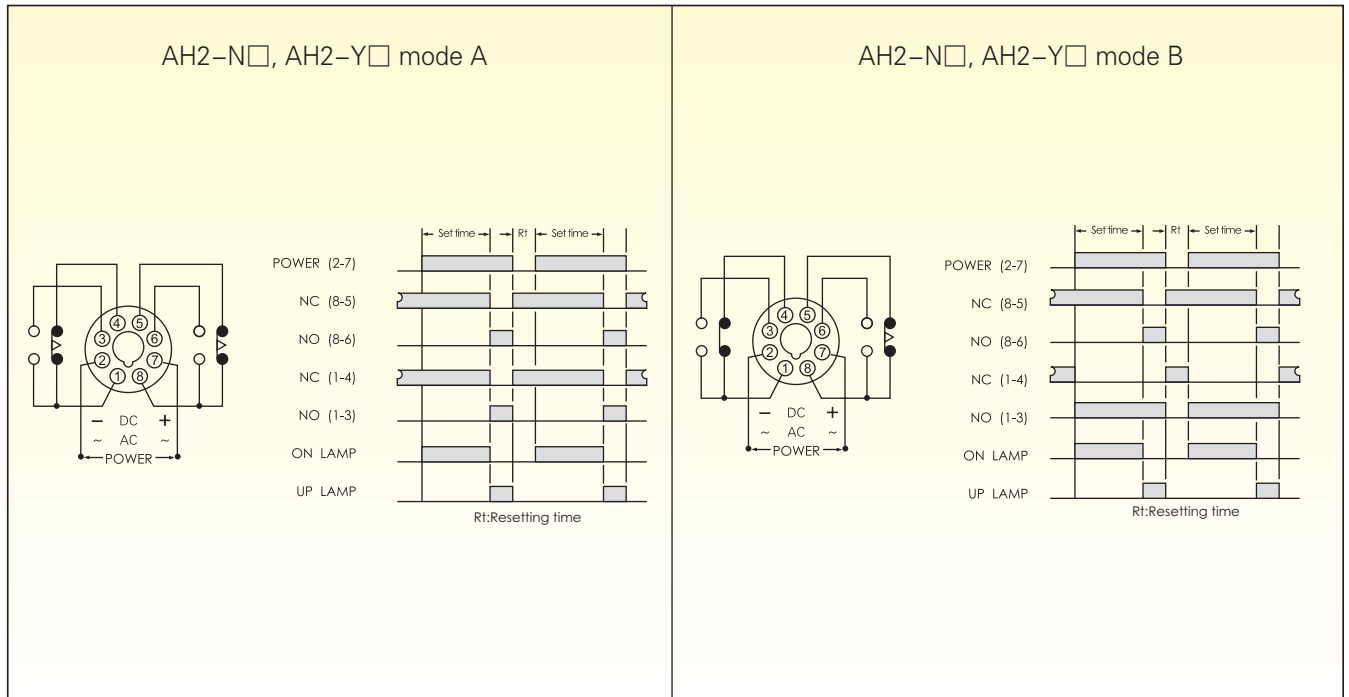

外觀尺寸圖

