




- 內裝CMOS IC故具高信賴度及穩定度
- 精確度高，往復誤差小於±1%以下
- 兩祇電源指示燈，指示電源接通及時間到指示
- 種類多，從0.1sec至24hrs，具有15種以上時間範圍
- 使用接合器(Type Y-40)即可將標準露出安裝型轉變為埋入安裝型

規格

時間範圍	A: 1S, 10S, 1M, 10M B: 3S, 30S, 3M, 30M C: 6S, 60S, 6M, 60M D: 1M, 10M, 1H, 10H E: 3M, 30M, 3H, 30H						
額定電壓	DC(V): 12, 24, 48 AC(V): 12, 24, 48, 110, 220, 240, 380, 415, 440, 50/60Hz						
指示燈動作	計時中閃爍						
輸出接點	型號	mode A	mode B	mode A	mode B	mode A	mode B
	限時 1C		5A		5A		5A
	限時 2C	5A		5A		5A	
	瞬時 1C		5A		5A		5A
壽命	電氣	10 ⁵ times					
	機械	5 x 10 ⁶ times					
復歸時間	0.1 sec max						
消耗功率	2VA						
使用周圍溫度	-10°C~ +55°C						
使用周圍濕度	45~85%RH						
重量	Approx. 170g		Approx. 175g		Approx. 180g		

接線圖與時序圖

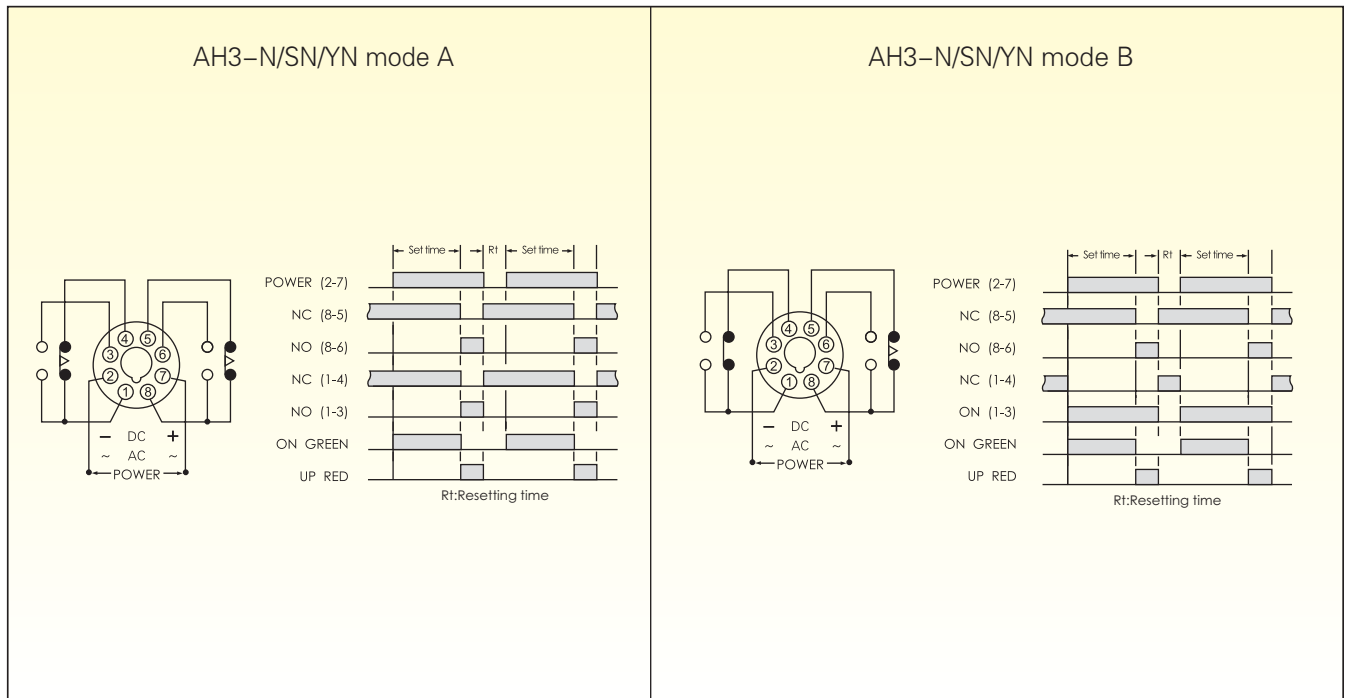

外觀尺寸圖

