




- 二位及三位按鍵設定限時繼電器
- 內裝CMOS IC故具高信賴度及穩定度
- 精確度高，往復誤差小於±1%以下
- 兩只電源指示燈，指示電源接通及時間到指示
- 使用接合器(Type Y-40)即可將標準露出安裝型轉變成埋入安裝型


規格

時間範圍		9.9S, 99S, 9.9M, 99M, 9.9H, 99H			99.9S, 999S, 99.9M, 999M, 99.9H, 999H		
額定電壓		DC(V):12, 24, 48 AC(V):12, 24, 48, 110, 220, 240, 380, 415, 440,50/60Hz					
指示燈動作		ON-UP兩只指示燈					
輸出接點	型號	AH3-1D	AH3-2D	AH3-3D	AH3-1D3	AH3-2D3	AH3-3D3
	限時1C	5A		5A	5A		5A
	限時2C		5A			5A	
	瞬時1C			5A			5A
壽命	機械	5×10 ⁶ times					
	電氣	10 ⁵ times					
復歸時間		0.1 sec max					
消耗功率		2VA					
使用周圍溫度		-10°C~+55°C					
使用周圍濕度		45~85%RH					
重量		Approx. 150g			Approx. 150g		

接線圖與時序圖

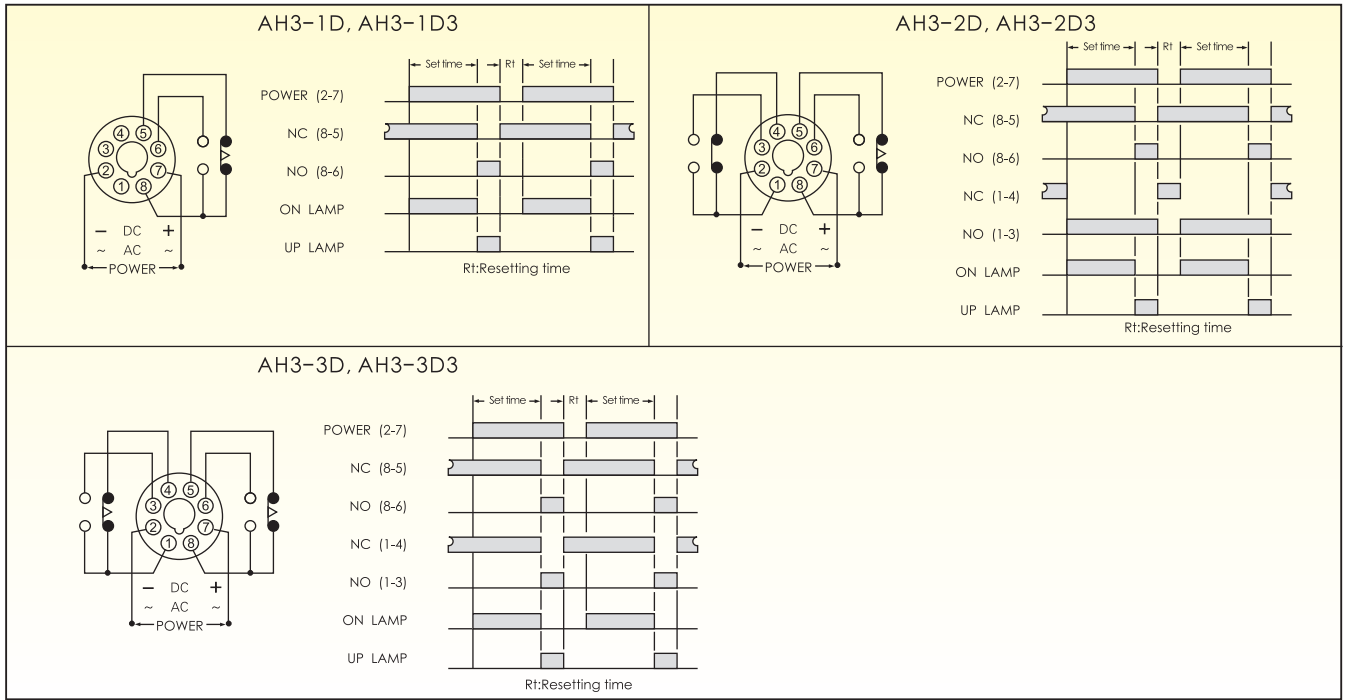

外觀尺寸圖

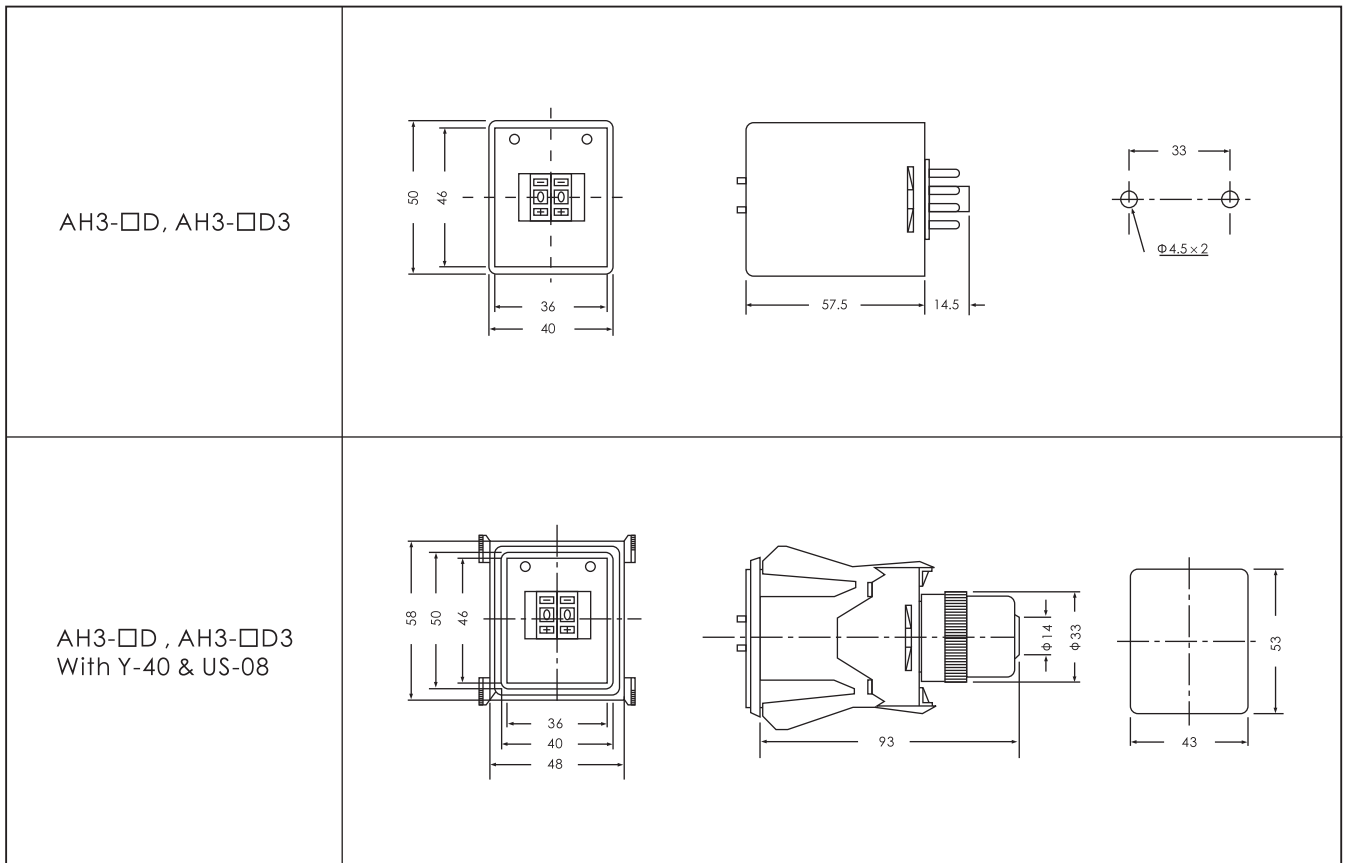

士研電氣有限公司
 ANY ELECTRONICS CO.,LTD.

<http://www.timer-switch.com>

<http://www.timer-relay.com>

<http://www.relay.com.cn>